

COOKWARE (CERAMIC)




Quarzit

QUARZIT is a uniquely designed ceramic sol-gel coating system for product concepts that aim for more than just comfort. Its two-layer structure—featuring a functional base coat and a sol-gel top coat—creates a textured, matte finish that combines visible cooking performance, accessible functionality, and non-stick convenience with a robust, high-quality appearance.

- A textured, matte, and slightly rough surface as a distinctive visual feature
- Two-layer system with a functional basecoat and a sol-gel topcoat
- Ceramic sol-gel coating system based on solvent-based technology
- A robust, premium appearance that conveys quality you can see and feel
- Formulation free of intentionally added PFAS

Properties

| | |
|-------------------------------------|-------------------------------|
| Number of layers | 2 |
| Coating thickness | 58 - 65 µm / 2.28 - 2.56 mils |
| Curing temperature to approx | 250 °C / 482 °F |
| Service temperature | 250 °C / 482 °F |
| Non-stick effect (egg 300 °C) | ★ ★ ★ ★ ★ |
| Non-stick effect (salt water/egg) | |
| Staining resistance (chicken wings) | ★ ★ ★ ★ ★ |
| Abrasion (LGA) | ★ ★ ★ ★ ★ |
| Durability (LGA total) | ★ ★ ★ ★ ★ |

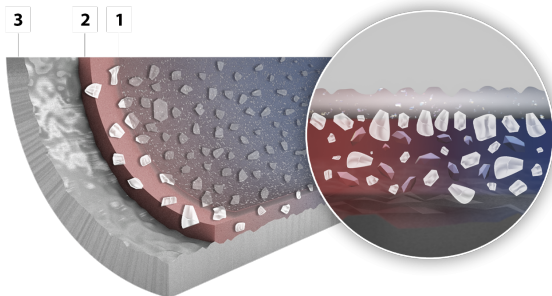

QUARZIT is a three-component system applied in two layers. On a specially prepared metal substrate, the basecoat—which contains embedded synthetic particles—forms the functional foundation; the sol-gel topcoat creates the defined, visible surface structure. The system is specifically formulated for reproducible application and consistent results, thereby creating a technically sound foundation for distinctive cookware concepts.

1. Sol-gel topcoat for a defined, visible surface texture with a rough, matte finish
2. A basecoat containing embedded synthetic particles as the functional foundation of the system
3. Specially prepared substrate for an optimum adhesion of the coating to the cookware product

Substrate

| Substrate | Pre-treatment | Suitability |
|----------------------|----------------------------|-------------|
| Pressed / forged alu | sandblasting with corundum | ✓ ✓ ✓ |
| Alu cast | sandblasting with corundum | ✓ ✓ ✓ |
| Stainless steel | sandblasting with corundum | ✓ ✓ ✓ |

COOKWARE (CERAMIC)



Cleaning and care instructions

After use, clean the pan with hot water, a mild washing-up liquid and a sponge cloth or the fine side of a dishwashing sponge. A soft dishwashing brush can also be used for cleaning. Always wipe the pan dry before storing it.

Stubborn food residues should never be cleaned with a metal sponge or the sharp side of a dishwashing sponge. Instead, soak the product in warm soapy water and then carefully clean the surface. Poorly cleaned items significantly reduce the non-stick effect and destroy the coating.

The product can be cleaned in the dishwasher, although this is not recommended due to the aggressive cleaning agents. Cleaning by hand is preferable.

Instructions for use

Before using for the first time, remove packaging, labels and all stickers and clean the item with liquid detergent and hot water. Boil new pans 2-3 times with water to remove any production residues and impurities. When using for the first time, rub the inside of the pan with a little cooking oil. This process should be repeated from time to time.

Never leave cookware unattended or empty on the hob and never leave it on the hot hob for longer than necessary.

Never heat the pan without food and above 250 °C. This can be prevented by using a little oil as a heat indicator, as oil above this temperature starts to produce smoke.

For frying, we recommend a medium temperature setting and the use of wooden or plastic utensils to avoid damaging the coating.

Longevity

Overheating can lead to discoloration and destroy the ceramic non-stick layer.

All coatings are sensitive to scratches and cuts. Small scratches are visible, but do not impair the properties.

Nevertheless, we do not recommend the use of metal cutlery and other sharp objects in cookware. Instead, the use of plastic or wooden utensils is recommended.

The use of small amounts of fats and oils significantly increases durability.

Temperature stability

Ceramic coatings heat up very quickly, so never leave them unattended on the stove.

Ceramic coating systems are exceptionally temperature-resistant and heat-stable (up to 400 °C). Nevertheless, the usage temperature of 250 QUARZIT Quarzit

COOKWARE (CERAMIC)



°C should not be exceeded, also to avoid destroying the food and its nutrients.

Overheating can burn food and leave black deposits on the coating. This can also damage the ceramic coating.